

## **Notification about the transfer of the semiconductor business**

The semiconductor business of Panasonic Corporation was transferred on September 1, 2020 to Nuvoton Technology Corporation (hereinafter referred to as "Nuvoton"). Accordingly, Panasonic Semiconductor Solutions Co., Ltd. became under the umbrella of the Nuvoton Group, with the new name of Nuvoton Technology Corporation Japan (hereinafter referred to as "NTCJ").

In accordance with this transfer, semiconductor products will be handled as NTCJ-made products after September 1, 2020. However, such products will be continuously sold through Panasonic Corporation.

Publisher of this Document is NTCJ.

If you would find description "Panasonic" or "Panasonic semiconductor solutions", please replace it with NTCJ.

※ Except below description page

"Request for your special attention and precautions in using the technical information and semiconductors described in this book"

**Nuvoton Technology Corporation Japan**

# MN103SL7 Series

## 32-bit Single-chip Microcontroller

### ■ Overview

The MN103S is a 32-bit microcontroller combining ease of use intended for programs development in the C language with a simple, high-performance architecture made possible through pursuit of cost performance.

This LSI series is well suited for in-vehicle electrical compressor control, in-vehicle body control, air conditioner, electrical power control and other applications.

Built around a compact 32-bit CPU with a basic instruction word length of 1 byte, this LSI includes internal memory for instructions and data, DMA controller, a clock generator, bus controller, interrupt controller, watchdog timer, standard peripheral circuitry such as timers and serial interfaces, PWM circuit best suited to controlling 3-phase motors, arithmetic unit for speed-up of inverter control and A/D converters for motor position control. The MN103S Series' high-speed CPU coupled with abundance of peripheral features provides an easy means of developing low-cost, high-performance and multifunctional system on LSI for motor and power control applications requiring fast response - a feature previously unavailable with conventional microcontrollers.

### ■ Product Summary

This datasheet describes the following model.

Model	ROM Size	RAM Size	Classification	Package
MN103SFL7G	128 KB	12 KB	Flash EEPROM version	TQFP048-P-0707F
MN103SFL7K	256 KB			

**■ Features**

## • CPU core

MN103S core  
4 GB of memory space (for instructions / data)  
LOAD/STORE architecture with 5-stage pipeline  
46 basic instructions + 23 extended arithmetic instructions  
6 addressing modes  
Instruction set of 1 byte in word length  
Extended arithmetic unit incorporated (high-speed multiply/divide instructions)  
Machine cycle: 16.7 ns (oscillation frequency: 10 MHz, 6 multiplying)  
Operation mode: NORMAL mode, SLEEP mode, HALT mode, STOP mode

## • Oscillation Circuit

External high-speed oscillation (crystal/ ceramic)  
Internal high-speed oscillation (10 MHz)  
Internal low-speed oscillation for Watchdog timer 2 (35 kHz)

## • Clock Multiplication Circuit

PLL output clock (IOCLK): High-speed oscillation is multiplied by 3 to 15

## • Internal Memory

ROM 128 KB (MN103SFL7G), ROM 256 KB (MN103SFL7K)  
RAM 12 KB

## • DMA Controller

Channel : 2 ch  
Transfer requests : 46 types  
(External interrupts: 8, Timer: 17, Serial: 6, IIC: 3, A/D converter: 4, CAN: 1, LIN: 1, PWM: 4,  
Power Voltage Detection: 1, Software: 1)  
Transfer mode : 3 modes (One word transfer / Burst transfer / Intermittent transfer)

## ■ Features (continued)

## • Interrupts

Internal interrupts      48 interrupts  
  Watchdog timer overflow interrupts  
  System error interrupts  
  Fail safe function interrupts  
    (Watchdog timer 2 overflow, Clock error detection, Register protect)  
  Power voltage detection interrupts

## &lt;Timer Interrupts&gt;

  Timer 0 underflow interrupt  
  Timer 1 underflow interrupt  
  Timer 2 underflow interrupt  
  Timer 3 underflow interrupt  
  Timer 4 underflow interrupt  
  Timer 5 underflow interrupt  
  Timer 6 underflow interrupt  
  Timer 7 underflow interrupt  
  Timer 16 overflow/underflow interrupt  
  Timer 16 compare/capture A interrupt  
  Timer 16 compare/capture B interrupt  
  Timer 18 overflow/underflow interrupt  
  Timer 18 compare/capture A interrupt  
  Timer 18 compare/capture B interrupt  
  Timer 19 overflow/underflow interrupt  
  Timer 19 compare/capture A interrupt  
  Timer 19 compare/capture B interrupt

## &lt;Serial interface&gt;

  Serial 0 UART reception completion interrupt  
  Serial 0 clock synchronous communication completion /UART transmission completion interrupt  
  Serial 0 transmission data buffer empty interrupt  
  Serial 1 UART reception completion interrupt  
  Serial 1 clock synchronous communication completion /UART transmission completion interrupt  
  Serial 1 transmission data buffer empty interrupt  
  IIC stop condition detection interrupt  
  IIC communication end interrupt  
  IIC transmission data buffer empty interrupt  
  LIN interrupt  
  CAN interrupt

## &lt;PWM&gt;

  PWM0 overflow interrupt  
  PWM0 underflow interrupt  
  PWM0 synchronous A/D conversion start A interrupt  
  PWM0 synchronous A/D conversion start B interrupt

## &lt;A/D&gt;

  A /D 0 conversion end interrupt  
  A /D 0 conversion end B interrupt  
  A /D 1 conversion end interrupt  
  A /D 1 conversion end B interrupt

## ■ Features (continued)

### • Interrupts (continued)

#### <DMA>

- DMA0 transfer end interrupt
- DMA0 request after DMA transfer end interrupt
- DMA0 transfer request overflow interrupt
- DMA1 transfer end interrupt
- DMA1 request after DMA transfer end interrupt
- DMA1 transfer request overflow interrupt

- External interrupts : 8 interrupts
- External interrupt pins : From IRQ00 to IRQ07
- Interrupt detection condition : Each edge, both edges, high-level and low-level detection  
Each interrupt detection condition is able to filtering with the noise filter

### • Timer Counter

- 8-bit timer : 8 sets
- 16-bit timer : 3 sets

#### Timer 0 (8-bit timer)

- Interval timer, Timer pulse output, Event count, Baud rate timer
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM0IO pin input, Timer 1 underflow, Timer 2 underflow

#### Timer 1 (8-bit timer)

- Interval timer, Timer pulse output, Event count, Baud rate timer, Cascade connection
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM1IO pin input, Timer 0 underflow, Timer 2 underflow

#### Timer 2 (8-bit timer)

- Interval timer, Baud rate timer, Cascade connection
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, Timer 0 underflow, Timer 1 underflow

#### Timer 3 (8-bit timer)

- Interval timer, Baud rate timer, Cascade connection
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, Timer 0 underflow, Timer 1 underflow, Timer 2 underflow

#### Timer 4 (8-bit timer)

- Interval timer, Timer pulse output, Event count
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM4IO pin input, Timer 5 underflow, Timer 6 underflow

#### Timer 5 (8-bit timer)

- Interval timer, Timer pulse output, Event count, Cascade connection
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM5IO pin input, Timer 4 underflow, Timer 6 underflow

#### Timer 6 (8-bit timer)

- Interval timer, Timer pulse output, Event count, Cascade connection
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM6IO pin input, Timer 4 underflow, Timer 5 underflow

#### Timer 7 (8-bit timer)

- Interval timer, Timer pulse output, Event count, Cascade connection
- Count clock source: IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM7IO pin input, Timer 4 underflow,  
Timer 5 underflow, Timer 6 underflow

**■ Features (continued)**

## • Timer Counter (continued)

## Timer 16 (16-bit timer)

Interval timer, Event count, Up/down count, Timer output,  
PWM output, Input capture, one-shot output, External trigger start  
Count clock source: IOCLK, IOCLK/8, Timer 4 underflow, Timer 5 underflow, TM16BIO pin input

## Timer 18 (16-bit timer)

Interval timer, Event count, Up/down count, Timer output,  
PWM output (output to 6 ports all at once is possible), Input capture, one-shot output, External trigger start  
Count clock source: IOCLK, IOCLK/8, IOCLK/64, Timer 7 underflow, TM18BIO pin input

## Timer 19 (16-bit timer)

Interval timer, Event count, Up/down count, External trigger start,  
Start by PWM0 overflow/underflow interrupt, A/D conversion start trigger generation  
Count clock source: IOCLK, IOCLK/8, Timer 6 underflow, Timer 7 underflow, TM19BIO pin input

## • Watchdog Timer

Count clock      Machine cycle  
Detection time    (External or internal) high-speed oscillation cycle  $\times 2^{16}$  to  $2^{24}$   
Generates non-maskable interrupt at detection  
Generates hard-reset at second consecutive overflow

## • Watchdog Timer 2

Count clock      Internal low-speed oscillation  
Detection time    457.14  $\mu$ s to 936.23 ms  
Generates non-maskable interrupt at detection  
Generates hard-reset at second consecutive overflow

## • A/D Converter

Minimum conversion time    0.6  $\mu$ s  
12 bit: 2 converters (8 channels, 7channels)  
A/D conversion start trigger pin output  
A/D conversion start trigger is in synchronization with complementary 3-phase PWM cycle and 16-bit timer  
Input signal amplification functions, 2 sets of difference input amplification (4 pins)  
Gain setting 2.03 to 19.45 times  
Input range  $\pm 1$  V (Negative voltage input is enabled)  
Offset cancel function (input short control, input chopping control)  
Half value of power supply voltage input function  
5 potentials between AVDD to AVSS.

## • Complementary 3-phase PWM output

Min. resolution: 16.7 ns  
Triangular and saw-tooth waves output  
Incorporates a dead time insertion circuit  
Can overwrite registers by double buffer during PWM operation  
PWM output protection circuit supporting external interrupts and non-maskable interrupt  
Output timing varying function  
A/D conversion start trigger, 16-bit timer start trigger output

## ■ Features (continued)

### • CAN Controller

Channels : 1 channel

CAN 2.0B specification basis

Communication method : NRZ (Non-Return to Zero)

Transmission line : Interactive 2-wire serial communication

Communication speed: Max 1 Mbps

Data length : 0 to 8 byte

Message frame : Standard frame and extended frame are supported

(Standard frame format ID: 11 bits, Extended frame format ID: 29 bits)

Buffer size : 32 messages (32 × 132 bit)

Interrupt: 1 interrupt

Interrupt requests:

Bus-off state, error active state

Error alert state (When the error counter is over 96.)

Release the error alert state (When the error counter is under 96.)

Transmission/Reception end

Transmission/Reception error (Ack/Form/Stuff/ Bit1/ Bit0/CRC error)

### • Serial Interface            2 channels

Serial 0 (Hardware LIN/Full duplex UART / Synchronous serial interface)

Synchronous serial interface

Overflow error detection

Transfer clock source: 1/2, 1/4, 1/16 and 1/64 of timer 0 underflow,

1/2, 1/4, 1/16 and 1/64 of timer 1 underflow,

1/2, 1/4, 1/16 and 1/64 of timer 2 underflow,

1/2, 1/4, 1/16 and 1/64 of timer 3 underflow, IOCLK/2, IOCLK/4, SBT0 pin

Transfer clock division value selection : Divided by 8, 16

Can be selected as the first bit to be transferred, Any transfer size from 2 to 8 bits can be selected.

Can be continuously transmitted, received or transmitted and received.

Maximum transfer rate: 5.0 Mbps

Full duplex UART

Parity check, Overflow and framing error detection

Transfer clock source: 1/2, 1/4, 1/16, and 1/64 of timer 0 underflow,

1/2, 1/4, 1/16, and 1/64 of timer 1 underflow,

1/2, 1/4, 1/16, and 1/64 of timer 2 underflow,

1/2, 1/4, 1/16, and 1/64 of timer 3 underflow,

IOCLK/2, IOCLK/4

Transfer clock division value selection : Divided by 8, 16

Can be selected as the first bit to be transferred, Any transfer size from 7 to 8 bits can be selected.

Continuous transmission, reception, and transmission/reception

Maximum transfer rate: 300 kbps

Hardware LIN

Operate in conjunction with Timer 4, 5 and 16.

Master communication: Synch Break field transmission

Slave communication: Wake-up reception, Synch Break field reception, Synch field reception, Check sum arithmetic

Error detection: Check sum error, bit error

## ■ Features (continued)

### • Serial Interface

Serial 1 (Multi master IIC / Full duplex UART / Synchronous serial interface)

Synchronous serial interface

Overrun error detection

Transfer clock source: 1/2, 1/4, 1/16 and 1/64 of timer 0 underflow,  
1/2, 1/4, 1/16 and 1/64 of timer 1 underflow,  
1/2, 1/4, 1/16 and 1/64 of timer 2 underflow,  
1/2, 1/4, 1/16 and 1/64 of timer 3 underflow,  
IOCLK/2, IOCLK/4, SBT1 pin

Transfer clock division value selection : Divided by 8, 16

Can be selected as the first bit to be transferred, Any transfer size from 2 to 8 bits can be selected.

Can be continuously transmitted, received or transmitted and received.

Maximum transfer rate: 5.0 Mbps

Full duplex UART

Parity check, Overrun and framing error detection

Transfer clock source: 1/2, 1/4, 1/16, and 1/64 of timer 0 underflow,  
1/2, 1/4, 1/16, and 1/64 of timer 1 underflow,  
1/2, 1/4, 1/16, and 1/64 of timer 2 underflow,  
1/2, 1/4, 1/16, and 1/64 of timer 3 underflow,  
IOCLK/2, IOCLK/4

Transfer clock division value selection : Divided by 8, 16

Can be selected as the first bit to be transferred, Any transfer size from 7 to 8 bits can be selected.

Continuous transmission, reception, and transmission/reception

Maximum transfer rate: 300 kbps

Multi master IIC

7, 10-bit slave address is settable

General call communication mode is supported

Transfer clock source: 1/2, 1/4, 1/16, and 1/32 of timer 0 underflow,  
1/2, 1/4, 1/16, and 1/32 of timer 1 underflow,  
1/2, 1/4, 1/16, and 1/32 of timer 2 underflow,  
1/2, 1/4, 1/16, and 1/32 of timer 3 underflow,  
IOCLK/2, IOCLK/4

Transfer clock division value selection : Divided by 8

### • Power Supply Voltage Detection

Detection level 4.15 V  $\pm$  0.25 V (At falling voltage)

4.25 V  $\pm$  0.25 V (At rising voltage)

When power supply voltage become equal to detection level, interrupt is generated.

### • Auto Reset Circuit

Detection level 3.50 V  $\pm$  0.20 V (At falling voltage)

3.65 V  $\pm$  0.35 V (At rising voltage)

When power supply voltage is under detection level, reset is generated.

### • Clock Monitoring Function

Frequency error of the external high-speed oscillation ( include PLL output) can detect.

When the error is detected, reset is generated.



■ Features (continued)


• Port / pins

I/O ports	30 pins
Motor control output	6 pins
External interrupt	8 pins
A/D input	8 pins
Input ports	4 pins
VGA, A/D input	4 pins
Special pins	14 pins
Reset input pin	1 pin
Oscillation pin	2 pins
Test mode input pin	2 pins
Power pin	7 pins
On-board debugger pin	2 pins

• Package Code name

TQFP48 (7 mm square, 0.5 mm pitch, halogen free)  
TQFP048-P-0707F

■ Pin Description

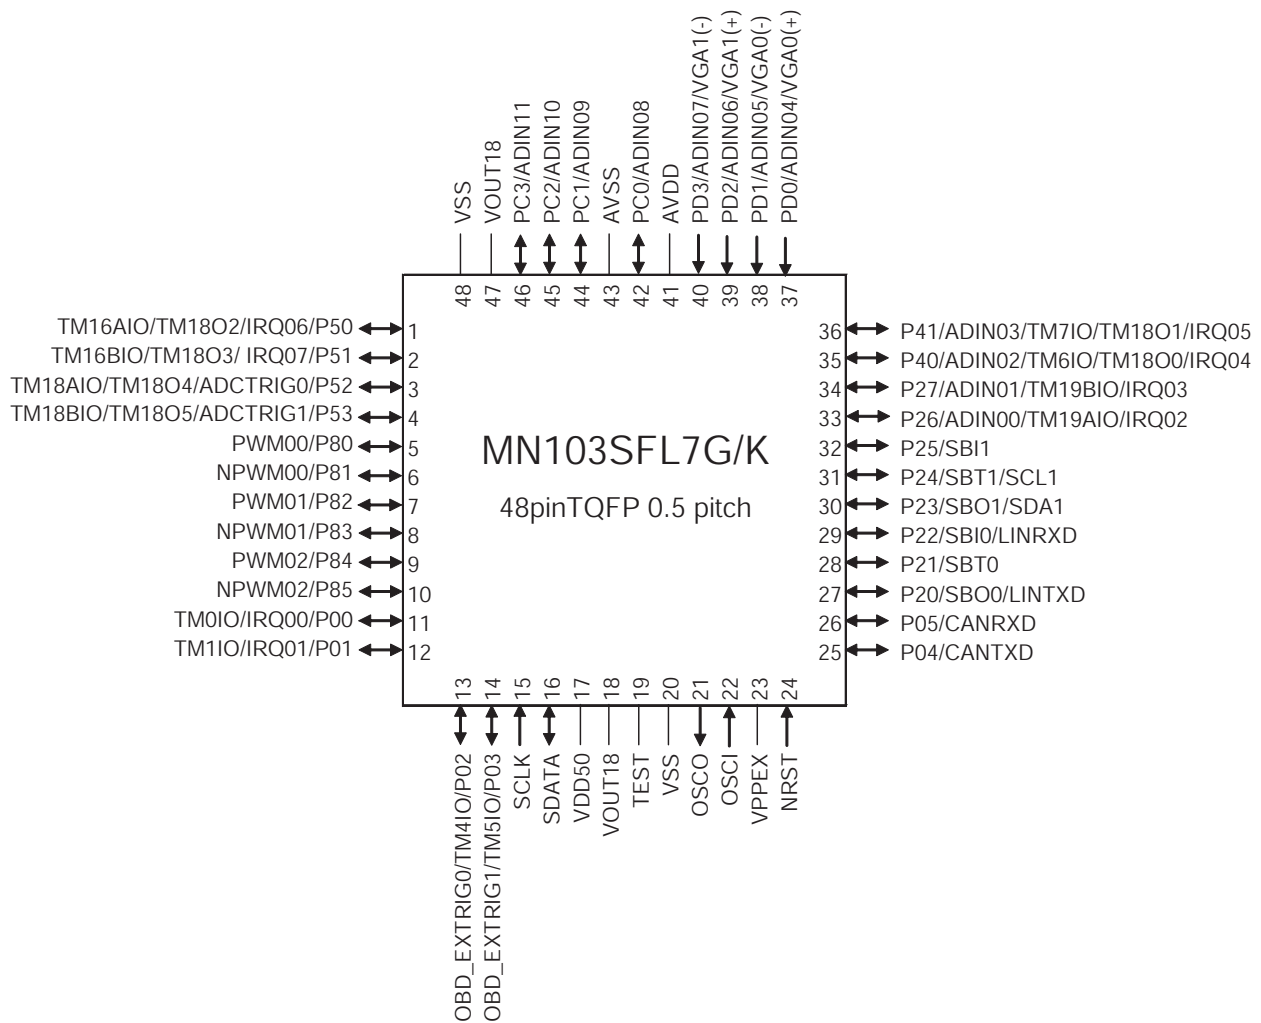

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation, Nuvoton Technology Corporation Japan or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information de-scribed in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.  
Please consult with our sales staff in advance for information on the following applications, moreover please exchange documents separately on terms of use etc.: Special applications (such as for in-vehicle equipment, airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, medical equipment and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.  
Unless exchanging documents on terms of use etc. in advance, it is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. We do not guarantee quality for disassembled products or the product re-mounted after removing from the mounting board.  
When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) When reselling products described in this book to other companies without our permission and receiving any claim of request from the resale destination, please understand that customers will bear the burden.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.