



## 2. Names and functions

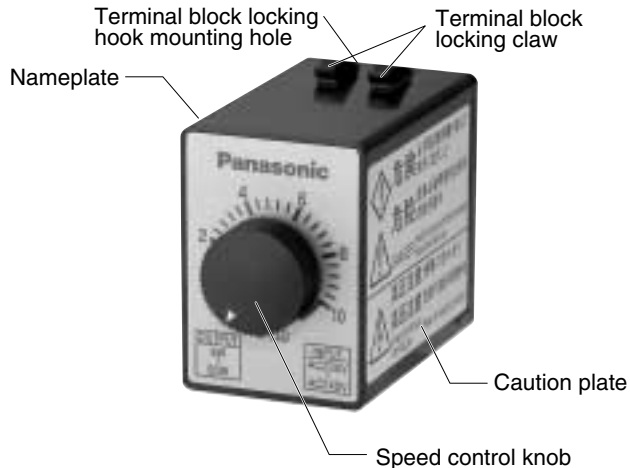

<Rear panel>

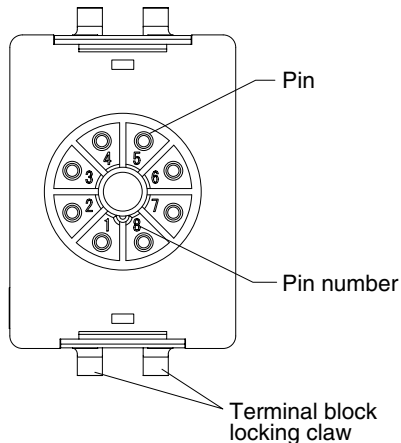

## 3. Installation

### Installation location

- (1) Indoors free from rain and direct sunlight: the product is not of a waterproof construction.
- (2) Free from vibration  $4.9 \text{ m/s}^2$  or more; shock, dust, iron powder or oil mist; splash of water, oil and grinding fluid; and away from flammable materials, corrosive gas ( $\text{H}_2\text{S}$ ,  $\text{SO}_2$ ,  $\text{NO}_2$ ,  $\text{Cl}_2$ , etc.) or flammable gas.
- (3) Well ventilated dry and clean location containing negligible amount of oil or dust.

### Environmental condition

Item	Condition
Operating temperature	-10 – 50°C
Storage temperature	-20 – 60°C
Operating humidity	90% RH or below (no dewing)
Allowable vibration	4.9 m/s <sup>2</sup> or below (10 – 60 Hz)
Altitude	1000 m max.