









ECQE(B) Type 250VDC Series (Metallized Polyester Film)

Erectrical Characteristics <Typical Data>

Temperature Characteristics

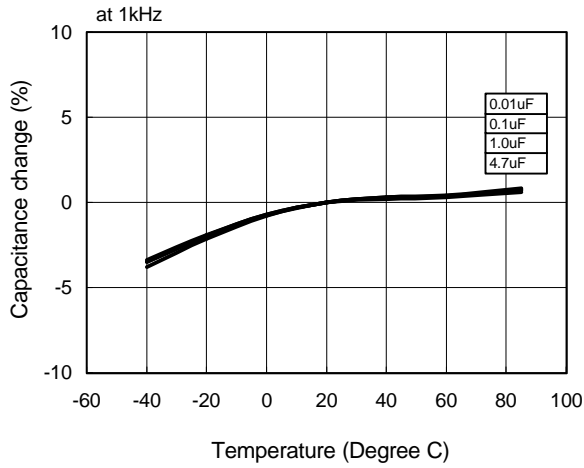

Frequency Characteristics

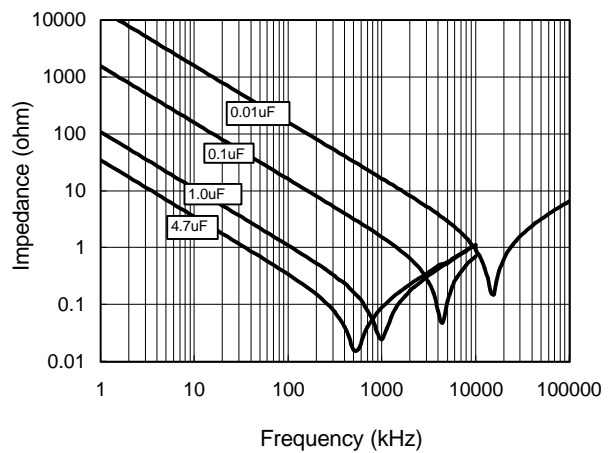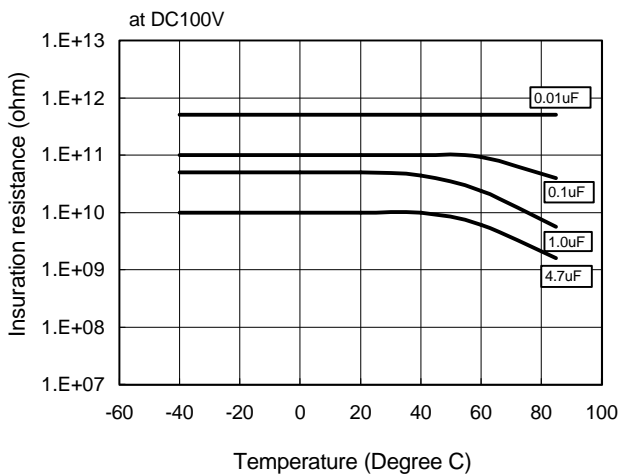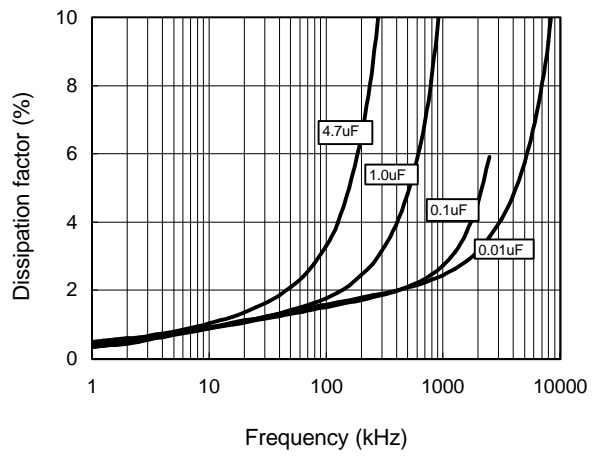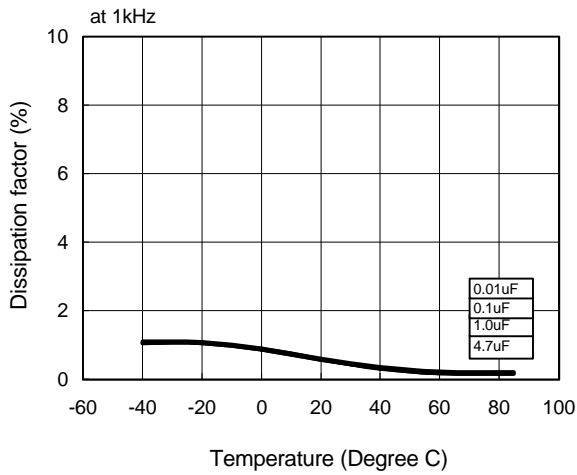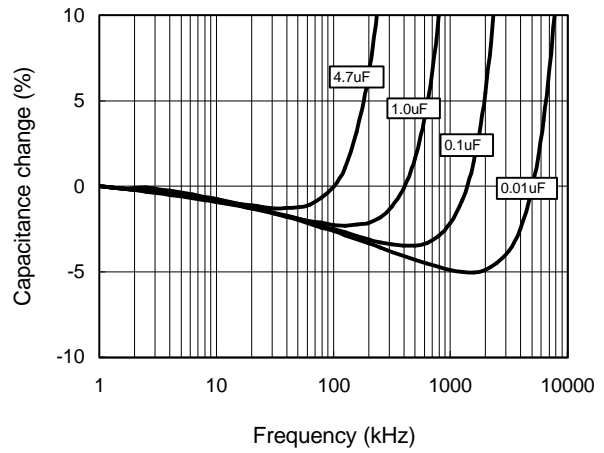





ECQE(B) Type 250VDC Series (Metallized Polyester Film)

Applicable Specifications

Permissible Current

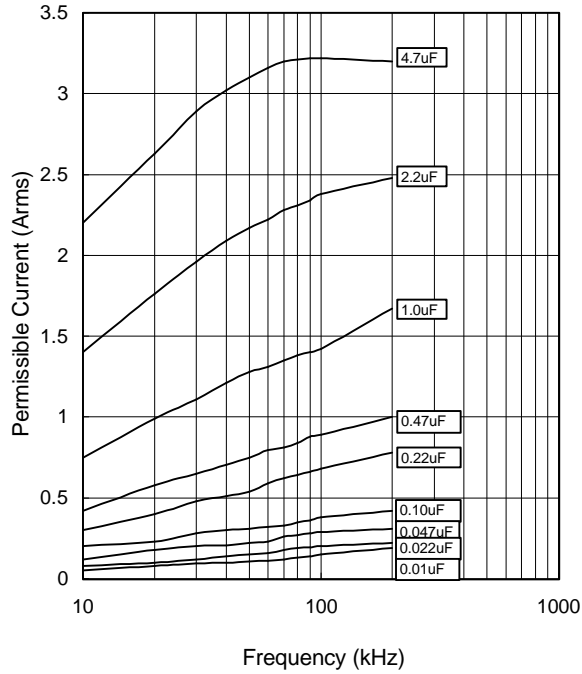

Permissible Voltage

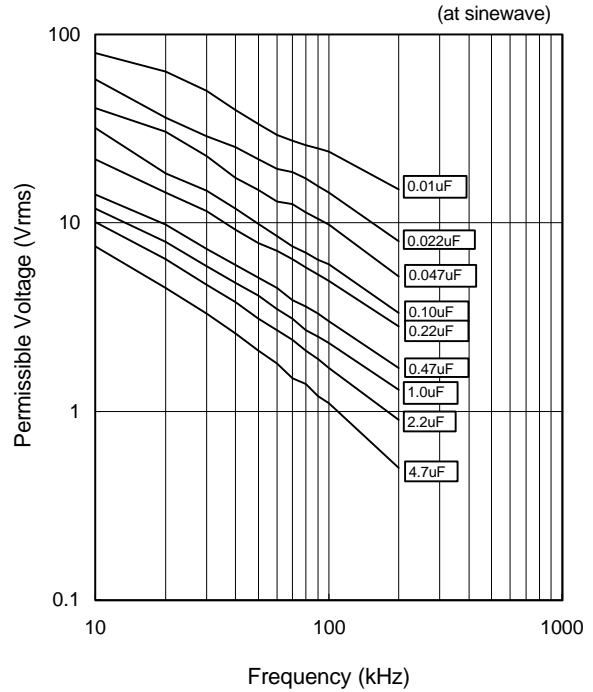


Pulse Handling Capability (dV/dt)

(Max 10000cycles)

Rating Voltage	Capacitance Value(uF)	Code	dV/dt(V/us)	Current(o-p) (A)
250VDC	0.010	103	48	0.48
	0.015	153		0.72
	0.022	223		1.06
	0.033	333		1.58
	0.047	473		2.26
	0.068	683		3.26
	0.100	104	4.80	
	0.150	154	7.20	
	0.220	224	33	7.26
	0.330	334	10.89	
	0.470	474	23	10.81
	0.680	684	15.64	
	1.000	105	18	18.00
	1.500	155	27.00	
	2.200	225	10	22.00
	3.300	335	33.00	
4.700	475	47.00		

Voltage Derating by Temperature

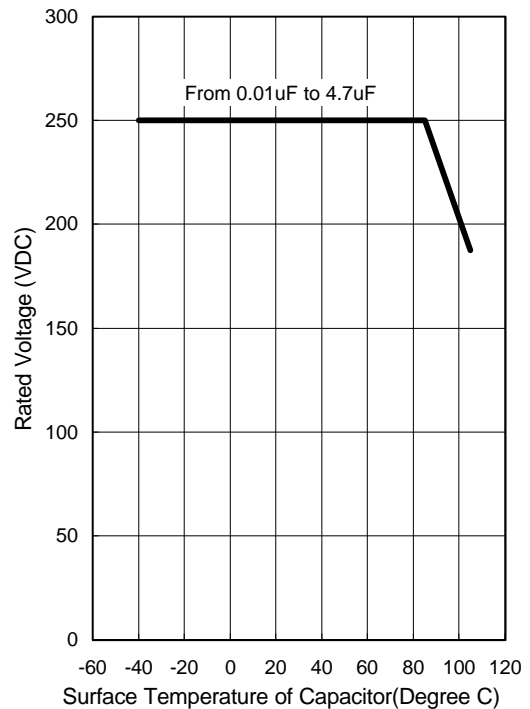


* Please consult Panasonic if your condition exceeds the above spec.



ECQE(B) Type 125VAC Series (Metallized Polyester Film)

Erectrical Characteristics <Typical Data>

Temperature Characteristics

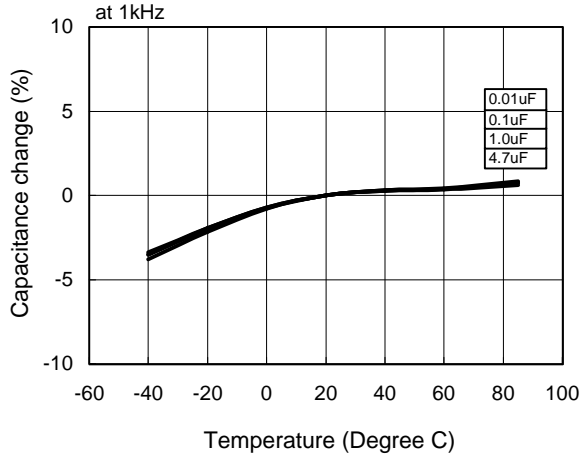

Frequency Characteristics

