

Lithium Battery



April 2022
Panasonic Energy Co., Ltd.

Please
access our
website





1. Wide product range

Panasonic offers a wide range of Lithium Batteries which meet your requests such as main battery for small devices, backup battery for emergency, etc

2. High quality based on many years of production

Over 40 years of technical development and manufacturing experiences

3. Excellent durability under severe conditions

Superior characteristics in a wide temperature range, and long term reliability suitable for outdoor devices(e.g. meters) which are difficult to maintain for a long time

Market Sectors

✓Lithium Batteries are used in various industries such as automotive, infrastructure and IoT

Automotive



RKE



TPMS



eCall



Infrastructure



Gas/Water meters



Fire alarms



AED



Manufacturing Machine



IoT



Construction machinery



Agricultural machinery




Water level sensor




Primary Lithium Batteries (Non-chargeable)	Coin-type Lithium Batteries	CR Series (Manganese Dioxide Lithium Batteries)
		BR Series (Poly-carbonmonofluoride Lithium Batteries)
	Cylindrical-type Lithium Batteries	CR Series (Manganese Dioxide Lithium Batteries)
		BR Series (Poly-carbonmonofluoride Lithium Batteries)
	Pin-type Lithium-ion Batteries	BR Series (Poly-carbonmonofluoride Lithium Batteries)

Example Lithium
Battery Model-Number
Composition
(Coin Type)

Example: **CR2032**

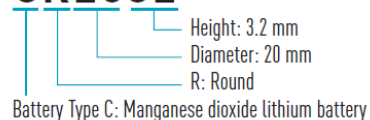

Size



CR series Manganese Dioxide Lithium Batteries




Features

- High rate pulse discharge
- Wide lineup from thin-type to high-drain models
- Excellent low-temperature performance enhanced by manganese-dioxide positive pole

Applications

RKE, memory backup, security price tag, etc

■ Discharge temperature characteristics (e.g. CR2032)

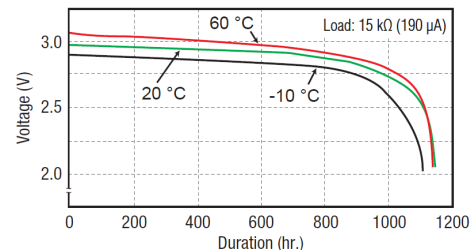

Model No.	Nominal voltage (V)	Nominal capacity (mAh) ^{*1}	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range ^{*2}
				Diameter	Height		
CR1025	3	30	0.1	10.0	2.5	0.6	-30 °C to 85 °C
CR1216		25		12.5	1.6	0.7	
CR1220		35			2.0	0.9	
CR1616		55		16.0	1.6	1.0	
CR1620		75			2.0	1.3	
CR1632		140			3.2	1.9	
CR2012		55	0.2	20.0	1.2	1.4	
CR2016		90			1.6	1.6	
CR2025		165			2.5	2.3	
CR2032		225			3.2	2.8	
CR2330		265		23.0	3.0	3.7	
CR2354		560			5.4	5.7	
CR2412		100		24.5	1.2	2.0	
CR2450		620			5.0	6.2	
CR2477		1,000			7.7	10.5	
CR3032		500		30.0	3.2	6.9	

*1. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

*2. Please consult Panasonic when anticipating usage in operating temperature of 70°C or above.

CR series Manganese Dioxide Lithium Batteries for High Temperature

Panasonic **ENERGY**



Features

- Superior discharge characteristics
- Enables to use in high temperature(Max. 125°C)

Applications

TPMS, ETC, meters(hot water, electricity), etc

Model No.*1	Nominal voltage (V)	Nominal capacity (mAh)*2	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range	
				Diameter	Height			
CR2032A	3	210	0.2	20.0	3.2	3.0	-40 °C to 125 °C	
CR2032B							-40 °C to 120 °C	
CR2050A		345		24.5	5.0	4.1	-40 °C to 125 °C	
CR2050B2								-40 °C to 120 °C
CR2450B		560						6.2

*1. Tabbed type batteries only


*2. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

Deliver excellent discharge characteristics in a wide range of temperature


Enables to use from low to high temperature

-40 to 125°C

※test condition is as following

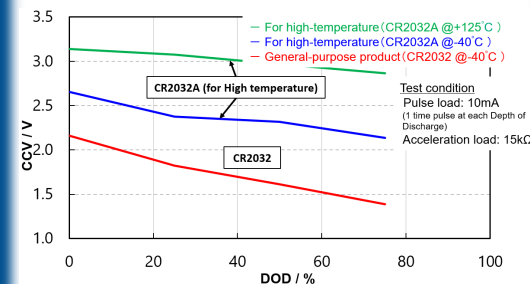

BR series Poly-carbonmonofluoride Lithium Batteries




Features

- BR series developed with exclusive Panasonic technology
- Exhibits stable performance after long periods in storage due to low self discharge characteristics
- Suitable for backup power in low drain applications

Applications

Commercial equipment (communication/measurement devices), electricity meters, memory backup, ETC, etc

■ Discharge temperature characteristics (e.g. BR2032)

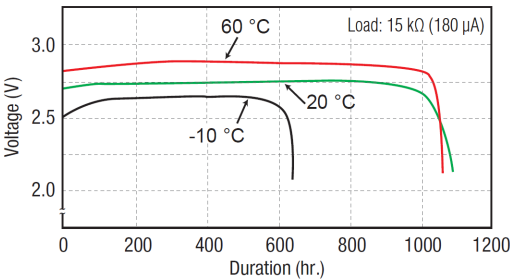

Model No.	Nominal voltage (V)	Nominal capacity (mAh)*1	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range*2
				Diameter	Height		
BR1220	3	35	0.03	12.5	2.0	0.7	-30 °C to 85 °C
BR1225		48			2.5	0.8	
BR1632		120		16.0	3.2	1.5	
BR2032		200		20.0		2.6	
BR2325		165		23.0	2.5	3.0	
BR2330		255			3.0	3.2	
BR3032		500		30.0	3.2	5.7	

*1. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

*2. Please consult Panasonic when anticipating usage in operating temperature of 80°C or above.

BR series Poly-carbonmonofluoride Lithium Batteries for High Temperature

Panasonic **ENERGY**




Features

- In addition to the appeal of normal BR series, this batteries can operate in temperature up to 125 °C

Applications

TPMS, ETC, meters(gas, water), memory backup, etc

■ Discharge temperature characteristics(e.g. BR1225A)

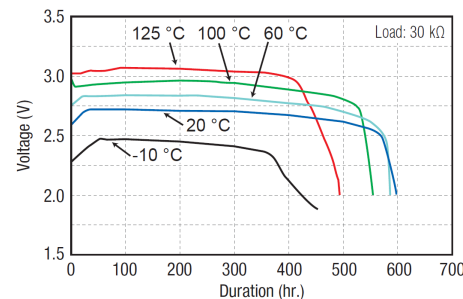

Model No.*1	Nominal voltage (V)	Nominal capacity (mAh)*2	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range
				Diameter	Height		
BR1225A	3	48	0.03	12.5	2.5	0.8	-40 °C to 125 °C
BR1632A		120		16.0	3.2	1.5	
BR2330A		255		23.0	3.0	3.2	
BR2450A		550		24.5	5.0	4.9	
BR2477A		1,000			7.7	7.9	

*1. Tabbed type batteries only

*2. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

CR series Manganese Dioxide Lithium Batteries(Standard Type)




Features

- Offer super high rate discharge, and suitable for cameras, lights, etc.
- Also available in the consumer market

Applications

Lights, Security devices(door lock, fire alarms), eCall, AED etc

■ Discharge temperature characteristics(e.g. CR123A)

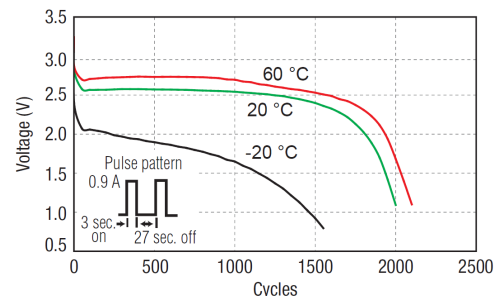

Model No.	Nominal voltage (V)	Nominal capacity (mAh)*1	Continuous drain (mA)	Dimensions (mm)			Mass (g)	Operating temperature range*3
				Diameter	Height			
CR2	3	850	20	15.6	27.0		11	-40 °C to 70 °C
CR123A		1,550		17.0	34.5		16	
Model No.	Nominal voltage (V)	Nominal capacity (mAh)*2	Continuous drain (mA)	Length	Width	Height	Mass (g)	Operating temperature range*3
2CR5	6	1,550	20	34.0	17.0	45.0	38	-40 °C to 70 °C
CR-P2				35.0	19.5	36.0	37	

*1. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

*2. Nominal capacity shown above is based on standard drain and cutoff voltage down to 4.0V at 20°C

*3. Please consult Panasonic when anticipating usage in operating temperature -40 to -20°C, or 60 to 70°C.

CR series Manganese Dioxide Lithium Batteries(Long-life Type)



Features

- Superior discharge characteristics and long-life
- Suitable for power of automotive devices due to superior low temperature discharge characteristics and compact design

Applications

Security devices(door lock, fire alarms), automotive electric components(tracking system, security alarms), meters(gas, water), AED, etc

Model No.*1	Nominal voltage (V)	Nominal capacity (mAh)*2	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range*3
				Diameter	Height		
CR-AGZ	3	2,700	2.5	17.0	45.5	23	-40 °C to 85 °C
CR-AG		2,400			22		
CR-2/3AU		1,600			33.5	16	
CR-2/3AZ							
CR2Z		1,000		15.6	27.0	11	
CR2U		1,800	14.5	50.5	18		
CR-AAU		1,650					
CR-AAK			100				

*1. provided with terminals or lead wire and connectors

*2. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

*3. Please consult Panasonic when anticipating usage in operating temperature of 70°C or above.


**Achieve long time reliability
and superior discharge
characteristics**

Conventional model:
less than 5 years



Improved model:
More than 10 years

*Test condition is as followings

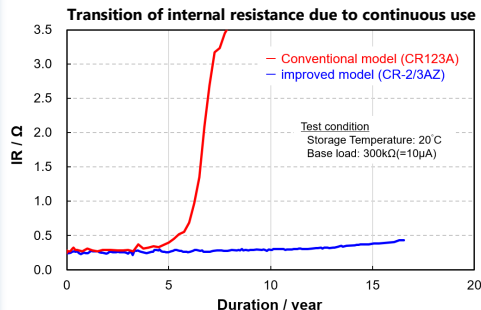

BR series Poly-carbonmonofluoride Lithium Batteries




Features

- Suitable for backup battery of metering devices due to superior long-storage life

Applications

Commercial equipment (communication/measurement devices), meters (gas, water), memory backup (manufacturing machine), automotive electric components (security alarms), etc

Example of discharge characteristic

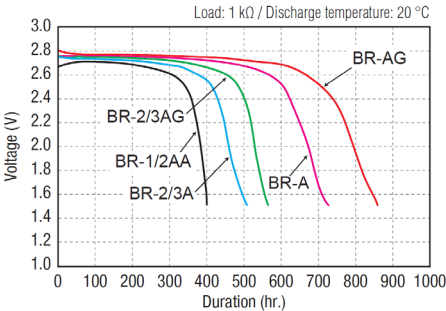

Model No.*1	Nominal voltage (V)	Nominal capacity (mAh)*2	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range
				Diameter	Height		
BR-1/2AA	3	1,000	2.5	14.5	25.5	8	-40 °C to 100 °C
BR-2/3A		1,200		17.0	33.5	13	
BR-2/3AG		1,450			45.5	18	-40 °C to 85 °C
BR-A		1,800					
BR-AG		2,200					
BR-C		5,000	5.0	26.0	50.5	41	

*1. provided with terminals or lead wire and connectors

*2. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

Pin-type Lithium Batteries




Features

- Panasonic original design
- Enable to generate power for LED lights

Applications

Electric fishing-float light, small transmitters, etc

Discharge temperature characteristics(e.g. BR435)

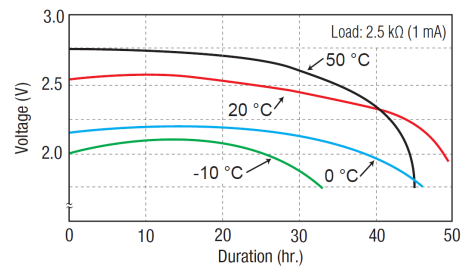

Model No.	Nominal voltage (V)	Nominal capacity (mAh)*1	Continuous drain (mA)	Dimensions (mm)		Mass (g)	Operating temperature range
				Diameter	Height		
BR425	3	25	0.5	4.2	25.9	0.5	-30 °C to 80 °C
BR435		50	1.0		35.9	0.8	

*1. Nominal capacity shown above is based on standard drain and cutoff voltage down to 2.0V at 20°C

About Terminals

- ✓ Panasonic offers a variety of tab terminals to meet your requests.
- ✓ Please note that it will be a customized solution if you need another tab terminal which is not shown on the web site.



Lithium Batteries Product List:

<https://industry.panasonic.eu/products/energy-building/batteries/battery-cells/primary-batteries/lithium-batteries>

Please feel free to contact us

Panasonic Energy Lithium Batteries HP

<https://industry.panasonic.eu/products/energy-building/batteries/battery-cells/primary-batteries/lithium-batteries>