

Testing Conditions**TESTING CONDITIONS**

	ASHRAE	P-REF	J-REF	ETI57R
Condensing Temperature	54.4 °C	40 °C	38.0 °C	54.4 °C
Evaporating Temperature	-23.3 °C	-30 °C	-23.3 °C	7.2 °C
Gas Superheated to	32.2 °C	32.2 °C	32.2 °C	46.1 °C
Liquid Subcooled to	32.2 °C	32.2 °C	32.2 °C	35.0 °C
Ambient Temperature	32.2 °C	32.2 °C	32.2 °C	35.0 °C

Dimensions


TK-SERIES

Appearance (Representative)

Rated Voltage / Frequency	Dimension (mm)			Mount	
	A	B	C	Dia. (mm)	Pitch (mm)
As indicated in the earlier table	139	204	155	Ø16 * 6	70 * 170

Tube Dimension (Representative)

Rated Voltage / Frequency	ID / OD (mm)			Location of Suction Tube
	Discharge	Suction	Process	
As indicated in the earlier table	4.9 / 7.0	6.5 / 7.94	6.5 / 7.94	Left Side

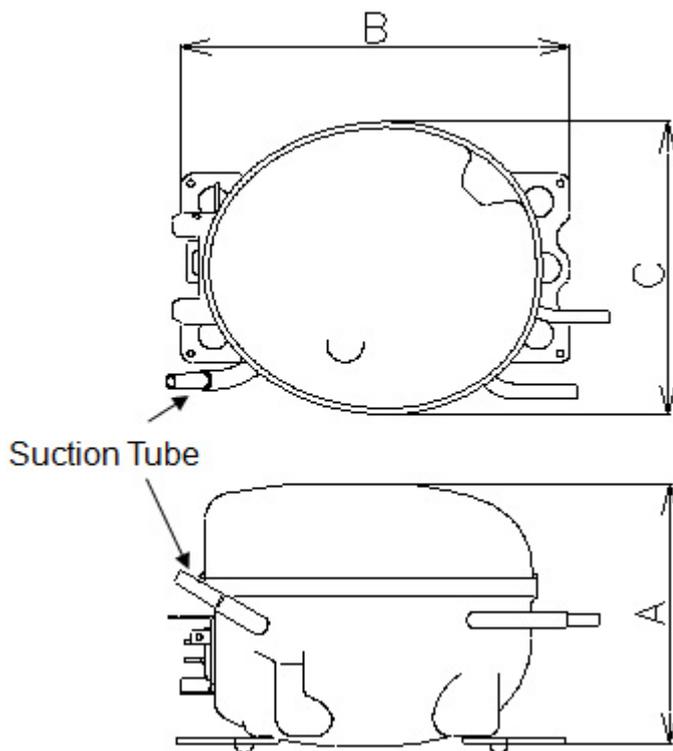

Dimensions


TR/E-SERIES

Appearance (Representative)

Rated Voltage / Frequency	Dimension (mm)			Mount	
	A	B	C	Dia. (mm)	Pitch (mm)
As indicated in the earlier table	155	195	155	Ø19 * 4	102 * 165

Tube Dimension (Representative)

Rated Voltage / Frequency	ID / OD (mm)			Location of Suction Tube
	Discharge	Suction	Process	
As indicated in the earlier table	4.9 / 7.0	6.5 / 8.3	6.5 / 7.94	Left Side

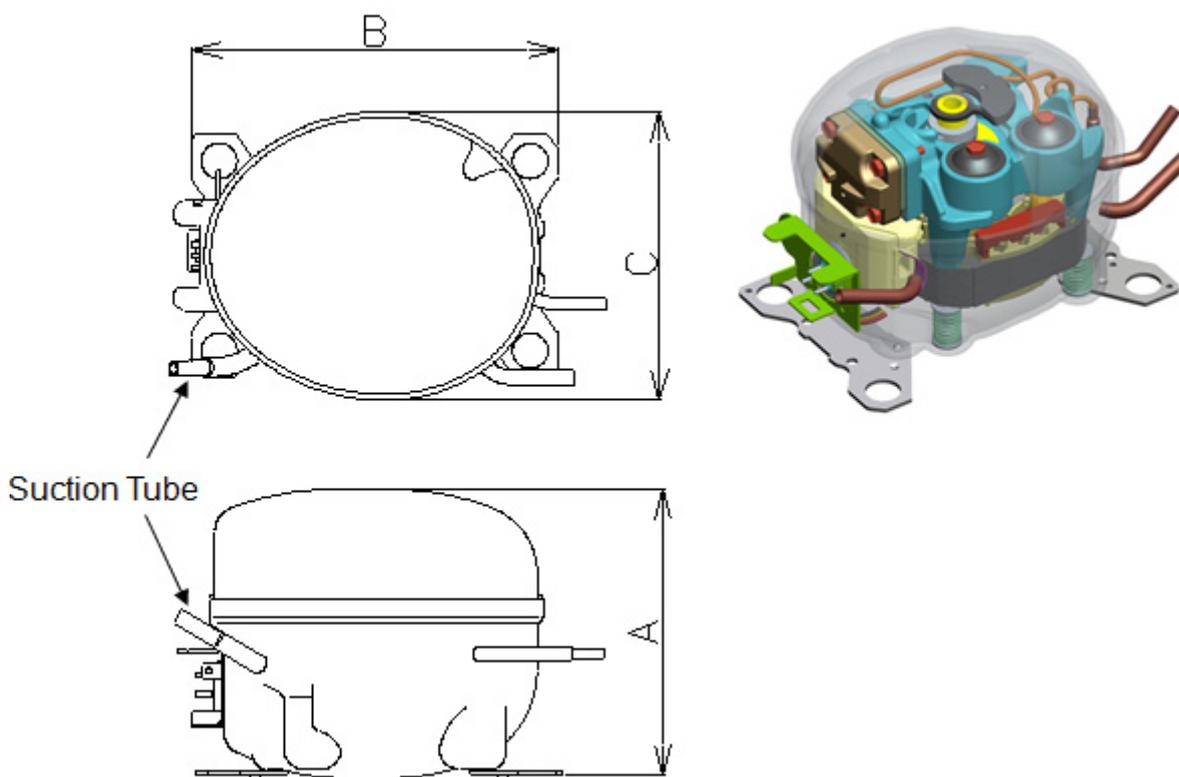

Testing Conditions**TESTING CONDITIONS**

	ASHRAE	P-REF	J-REF
Condensing Temperature	54.4 °C	40 °C	38.0 °C
Evaporating Temperature	-23.3 °C	-30 °C	-23.3 °C
Gas Superheated to	32.2 °C	32.2 °C	32.2 °C
Liquid Subcooled to	32.2 °C	32.2 °C	32.2 °C
Ambient Temperature	32.2 °C	32.2 °C	32.2 °C

Dimensions

SV-SERIES

Appearance (Representative)

Rated Voltage / Frequency	Dimension (mm)			Mount	
	A	B	C	Dia. (mm)	Pitch (mm)
As indicated in the earlier table	142	192	149	Ø19 * 4	102 * 165
				Ø16 * 4	70 * 170

Tube Dimension (Representative)

Rated Voltage / Frequency	ID / OD (mm)			Location of Suction Tube
	Discharge	Suction	Process	
As indicated in the earlier table	4.9 / 7.0	6.54 / 7.94	6.54 / 7.94	Left Side

