







EPCU (A) Type DC16V series (Stacked Metallized Film)

Electrical Characteristics <Typical Data >

Temperature Characteristics

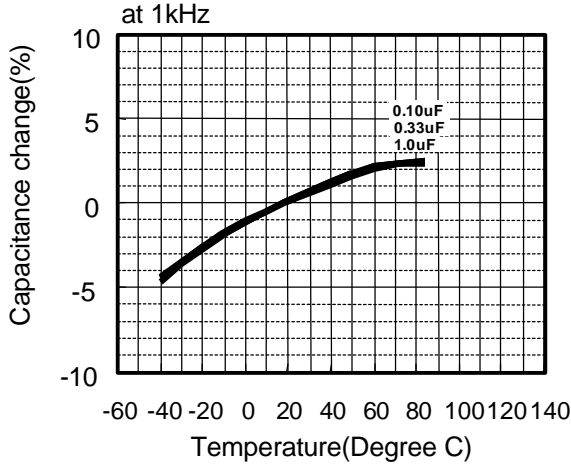



Frequency Characteristics

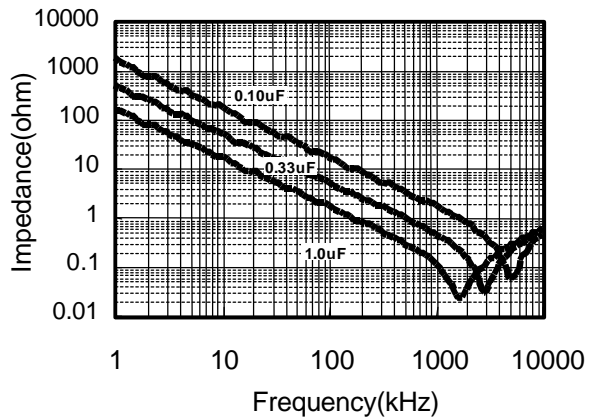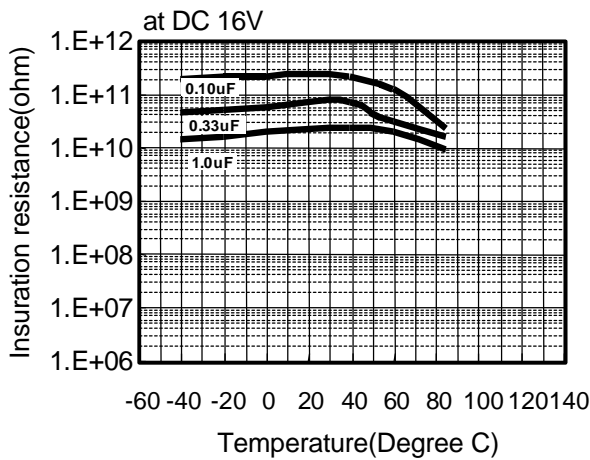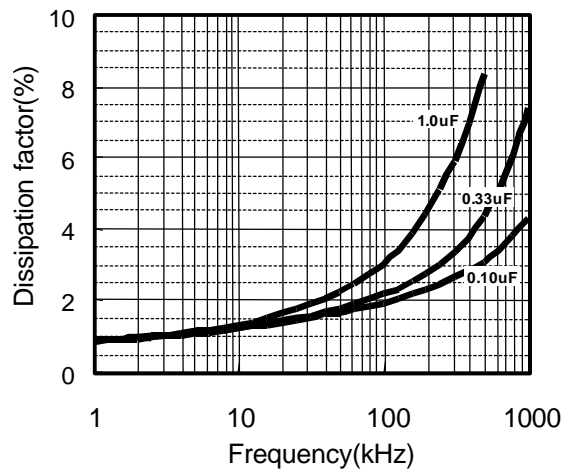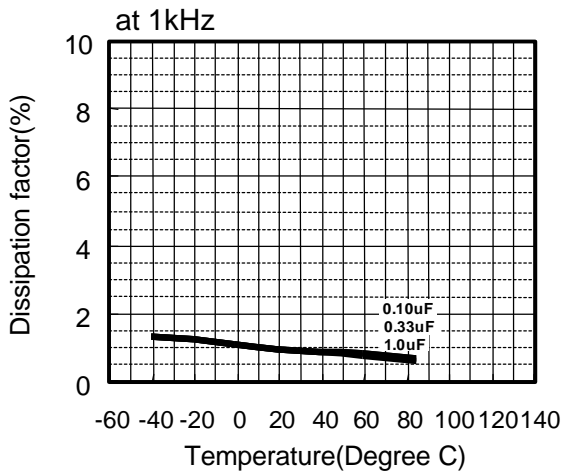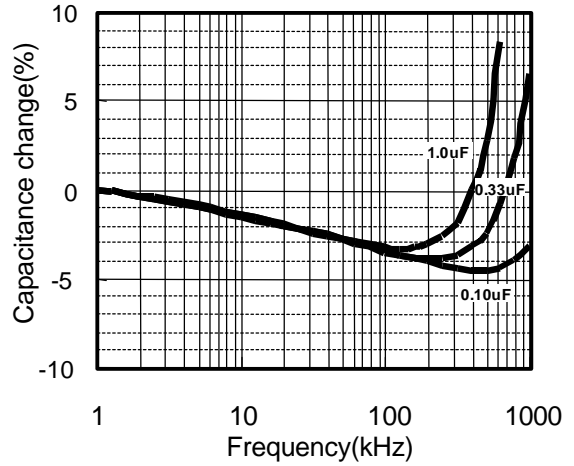



ECPU (A) Type DC16V series (Stacked Metallized Film)


Applicable Specifications

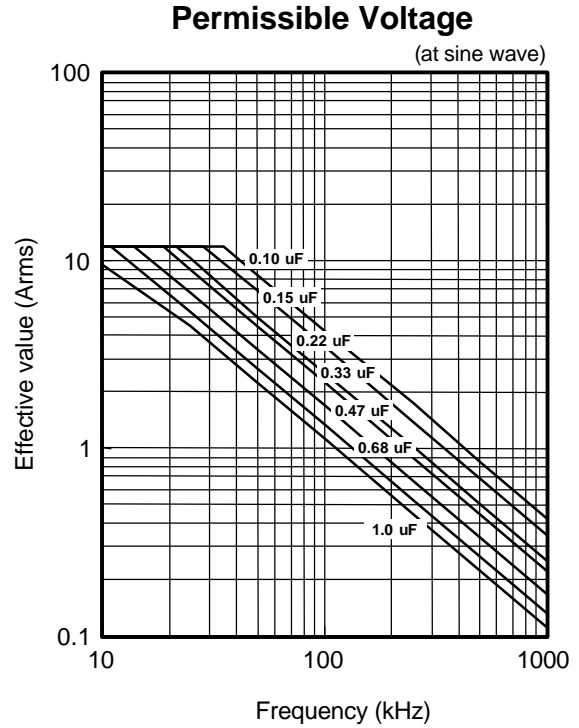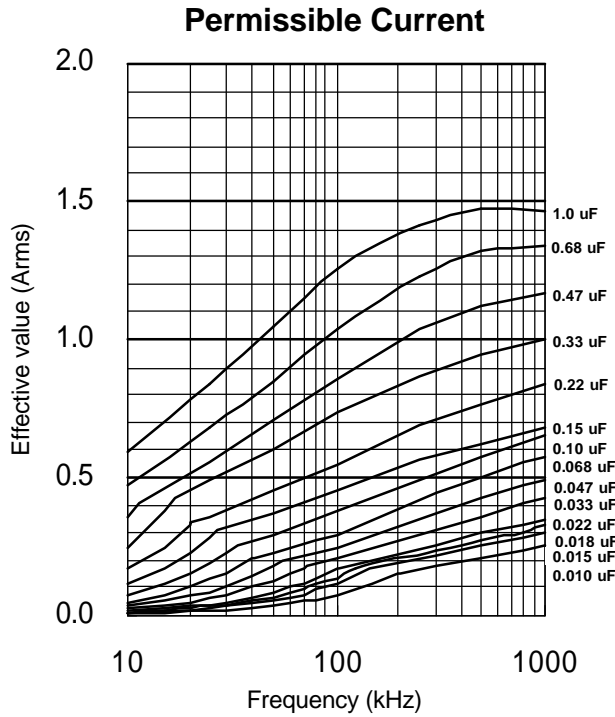

Pulse Handling Capability (dv/dt) (Max 10000cycles)

Rating Voltage	Capacitance Value(uF)	Code	dv/dt(V/us)	Current _(0-P) (A)
DC 16V	0.10	104	19	1.9
	0.15	154	15	2.3
	0.22	224	13	2.9
	0.33	334	10	3.3
	0.47	474	7	3.3
	0.68	684	5	3.4
	1.0	105	3	3.0

Voltage Derating by Temperature

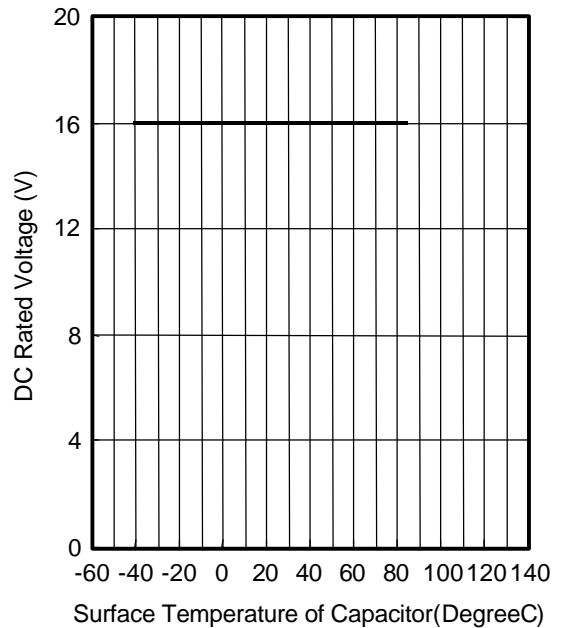

* Please consult Panasonic if your condition exceeds the above spec.

*Permissible voltage graph is the case of sine waveform. When you use this product, peak voltage must not exceed DC rated voltage.

*The current_(0-P) value is calculated using nominal capacitance.