




Features & Benefits

- A single cell lithium pin battery can light an LED
- Panasonic Original battery design


Specifications

| | | |
|-----------------------|----------------|---------------|
| Part number | | BR425 |
| Nominal voltage | | 3V |
| Nominal capacity | | 25mAh |
| Continuous drain | | 0.5mA |
| Dimensions | Diameter(Max.) | 4.2mm |
| | Height(Max.) | 25.9mm |
| Weight | | Approx. 0.6g |
| Operating temperature | | -30°C ~ +80°C |


Dimensions

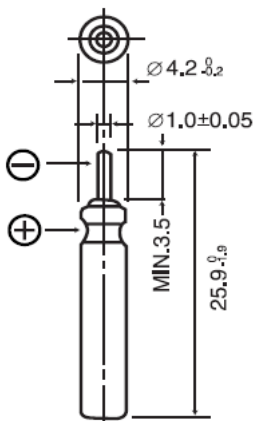

Discharge temperature characteristics

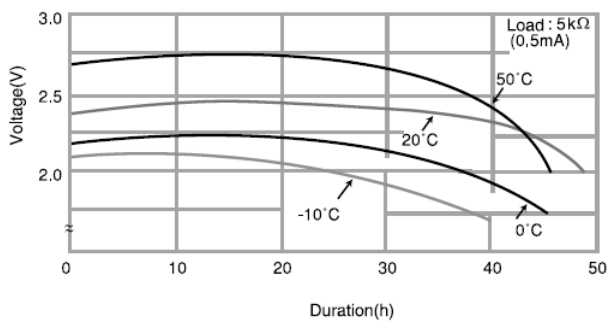

Operating voltage vs. Discharge current (voltage at 50% discharge depth)

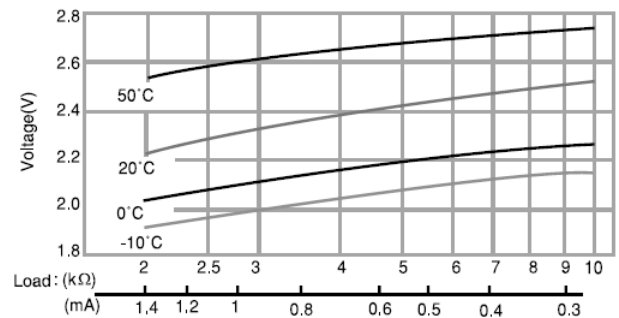


Applications

Electrical fishing-float lights, small transmitters, etc

This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. As of March, 2021. The contents of this product information are subject to change without notice.

Capacity vs. load resistance

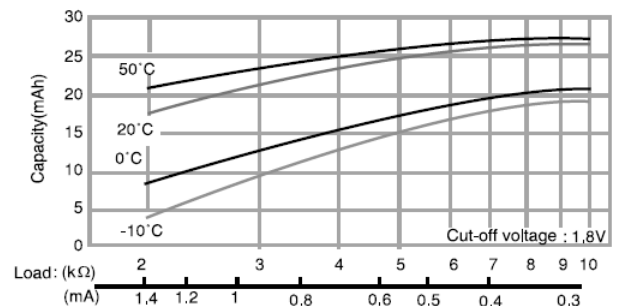

Please visit our website at:

Panasonic Corporation

<https://industrial.panasonic.com/ww/products/batteries/primary-batteries/lithium-batteries>

