


# CR1632

## CR Coin-type Lithium Battery




### Features & Benefits

- Offers high-rate pulse discharge
- Available in a range of compact sizes and capacities, from thin-type to high-capacity models
- Excellent low-temperature performance enhanced by manganese-dioxide positive pole


### Applications

Remote keyless entry, Card remote controls, memory backup, security price tags, smart transmitter tags and others.

#### Discharge temperature characteristics

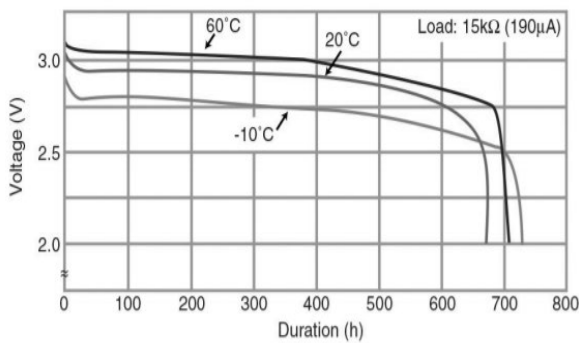

#### Capacity vs. load resistance

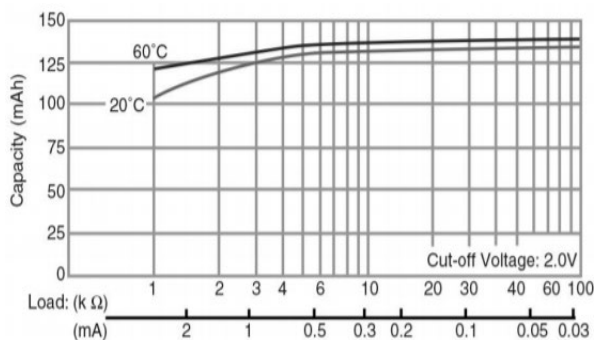

### Specifications

Nominal voltage	3V	
Nominal capacity	140mAh	
Continuous drain	0.1mA	
Dimensions* 1	Diameter(Max.)	16.0mm
	Height(Max.)	3.2mm
Weight*1	Approx. 1.9g	
Operating temperature*2	-30°C to +85°C	

\*1 Without tabs.

\*2 Please consult Panasonic when anticipating usage in operating temperatures of 70°C or above.

### Terminal types

Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types\(by shape\)](#)
- [Line up of tab terminal types\(by product number\)](#)

#### Operating voltage vs. load resistance (voltage at 50% discharge depth)

