



## Cell Type KR-5/3MH Specifications

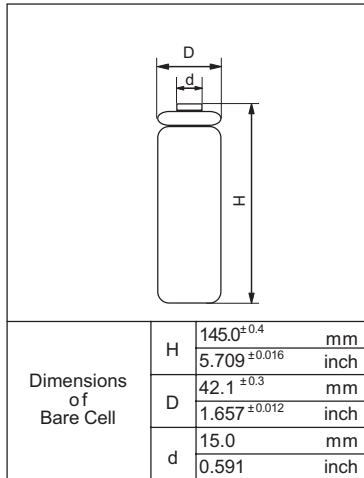


Nominal Capacity		20000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	667mA
	Standard	2000mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [ +32°F to 158°F ]
	Discharge	-20°C to +70°C [ -4°F to 158°F ]
	Storage	-30°C to +70°C [ -22°F to 158°F ]
Internal Impedance (Av.) (at. 50% discharge)		2.6mΩ (at 1000Hz)
Weight		648g/ 22.86oz
Dimensions(D)x(H) (with tube)		43.1 <sup>0</sup> <sub>-1</sub> × 146.1 <sup>0</sup> <sub>-1.5</sub> mm
		1.70 <sup>0</sup> <sub>-0.04</sub> × 5.75 <sup>0</sup> <sub>-0.06</sub> inch

### Typical Characteristics


#### Charge

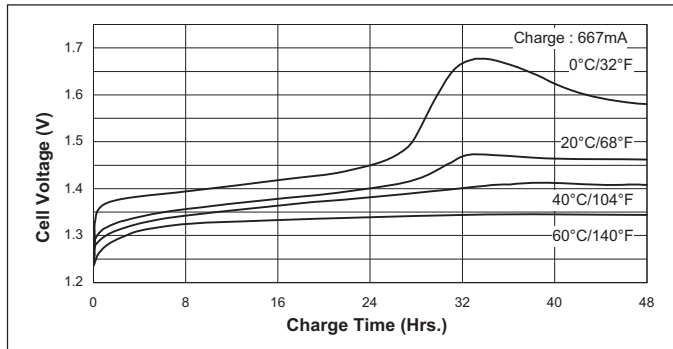


#### Discharge(at high rate)

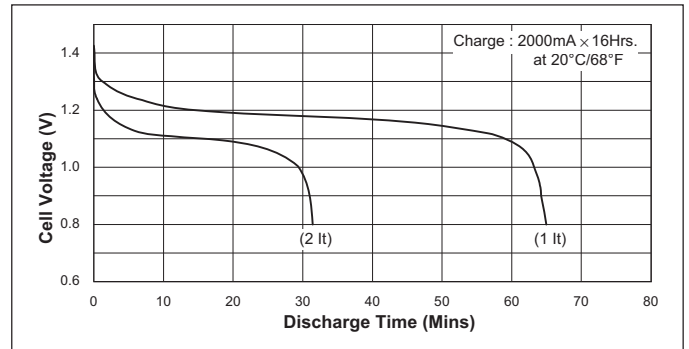


#### Charge

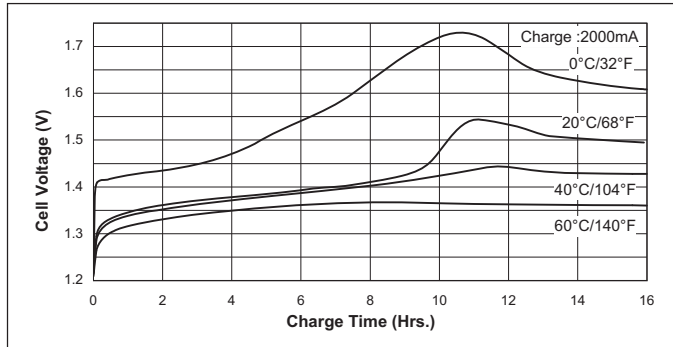

#### Discharge(at high rate)

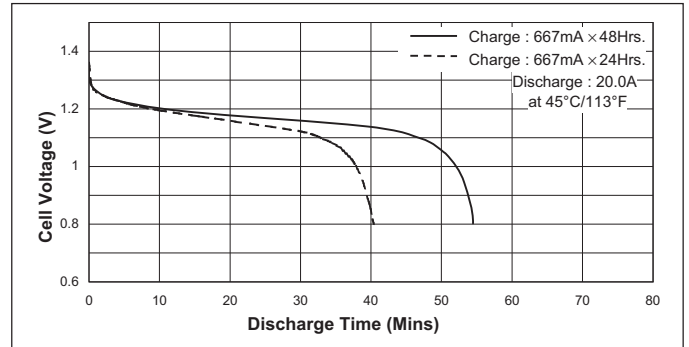

#### Discharge(at low rate)

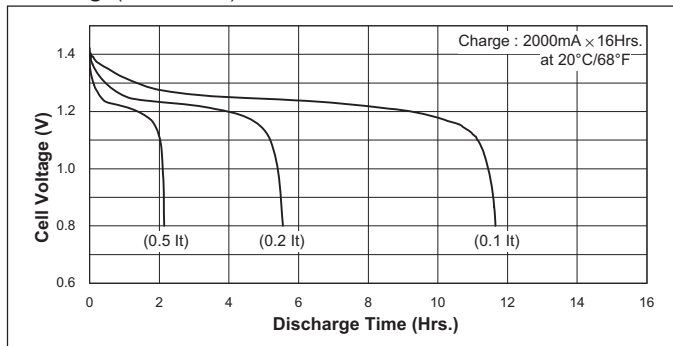

#### Temperature(Charge & Discharge)

