


製品品番	静電容量 $\mu F$ ( * )	寸 法							表示 STYLE
		$\Delta L$	$\Delta T$	$\Delta H$	F	G	d		
ECQE2103 ( ) B	0.01 (103)	7.9	4.2	7.1	5.0	1.0	0.5	1	
" 2123 ( ) B	0.012 (123)	"	"	"	"	"	"	"	
" 2153 ( ) B	0.015 (153)	"	"	"	"	"	"	"	
" 2183 ( ) B	0.018 (183)	"	4.3	7.2	"	"	"	"	
" 2223 ( ) B	0.022 (223)	"	"	"	"	"	"	"	
" 2273 ( ) B	0.027 (273)	"	"	"	"	"	"	"	
" 2333 ( ) B	0.033 (333)	"	"	"	"	"	"	"	
" 2393 ( ) B	0.039 (393)	"	4.5	7.4	"	"	"	"	
" 2473 ( ) B	0.047 (473)	"	"	"	"	"	"	"	
" 2563 ( ) B	0.056 (563)	"	4.7	7.7	"	"	"	"	
" 2683 ( ) B	0.068 (683)	"	5.1	8.0	"	"	"	"	
" 2823 ( ) B	0.082 (823)	"	5.4	8.6	"	"	"	"	
" 2104 ( ) B	0.1 (104)	"	5.9	9.0	"	"	"	"	
" 2124 ( ) B	0.12 (124)	"	5.7	10.6	"	"	"	"	
" 2154 ( ) B	0.15 (154)	"	6.3	11.2	"	"	"	"	
" 2184 ( ) B	0.18 (184)	10.3	5.0	9.7	7.5	"	"	"	
" 2224 ( ) B	0.22 (224)	"	5.4	10.1	"	"	"	"	
" 2274 ( ) B	0.27 (274)	"	5.9	10.8	"	"	"	"	
" 2334 ( ) B	0.33 (334)	"	6.4	11.3	"	"	"	"	
" 2394 ( ) B	0.39 (394)	12.3	5.7	10.9	10.0	"	0.6	"	
" 2474 ( ) B	0.47 (474)	"	6.2	11.4	"	"	"	"	
" 2564 ( ) B	0.56 (564)	"	6.7	11.9	"	"	"	"	
" 2684 ( ) B	0.68 (684)	"	7.3	12.7	"	"	"	"	
" 2824 ( ) B	0.82 (824)	15.3	6.3	13.3	12.5	"	"	2	
" 2105 ( ) B	1.0 (105)	"	7.0	14.0	"	"	"	"	
" 2125 ( ) B	1.2 (125)	"	7.6	14.6	"	"	"	"	
" 2155 ( ) B	1.5 (155)	"	8.6	15.7	"	"	"	"	
" 2185 ( ) B	1.8 (185)	20.8	7.6	14.6	17.5	"	0.8	"	
" 2225 ( ) B	2.2 (225)	"	8.4	15.6	"	"	"	"	
" 2275 ( ) B	2.7 (275)	"	9.3	16.7	"	"	"	"	
" 2335 ( ) B	3.3 (335)	"	10.5	17.9	"	"	"	"	
" 2395 ( ) B	3.9 (395)	"	10.8	19.8	"	"	"	"	
" 2475 ( ) B	4.7 (475)	"	11.9	21.0	"	"	"	"	

静電容量許容差 (J or K)


#### 品番呼称方法

ECQE 2 103 K B (250VDC, 0.01 $\mu F$ ,  $\pm 10\%$ )


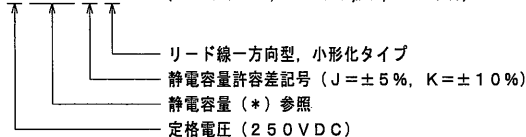


#### 表示例

STYLE 1



STYLE 2

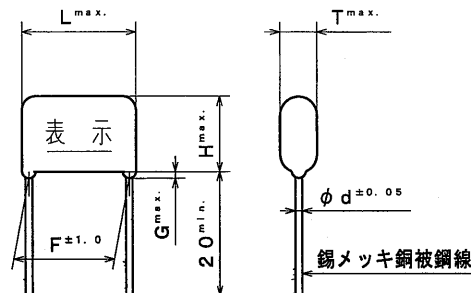

改 正 履 歴 表			
符号	年 月 日	改 正 内 容	制定者
△	2008. 4. 1	社名変更 訂正：カテゴリ温度範囲 (-40℃～+85℃→-40℃～+105℃) 追記：定格電圧 (85℃以上は1.25%/℃の電圧軽減)	長岡
△	2012. 4. 1	社名変更	長岡
△	2013. 4. 1	社名変更	福光
△	2015. 4. 1	社名変更	高田
仕 様			
使用条件	カ テ ゴ リ 温 度 範 囲	△ - 4 0℃～+ 1 0 5℃ (壁面における自己温度上昇を含む)	
構造一般	外 装	難燃性エポキシ樹脂外装	
	素子構造	メタライズドポリエステルフィルム	
電 気 的 性 能	静 電 容 量	左 表 参 照	
	定 格 電 圧	2 5 0 V D C △ ( 8 5℃以上は1.25%/℃の電圧軽減)	
	静電容量許容差	± 5 % ( J ) , ± 1 0 % ( K )	
	絶 縁 抵 抗	3 0 0 0 M Ω ・ μ F 以上, at 2 0℃ (但し, 0.33 μ F 以下は9 0 0 0 M Ω 以上) - 1 0 0 V D C for 6 0 s -	
	誘 電 正 接	1.0%以下, at 1 k H z , 2 0℃	
	耐 電 圧	2 5 0 V D C × 1 5 0 % for 6 0 s (但し, 充電の際は2 k Ω 以上の抵抗を通すこと)	
仕様書番号		T E B 8 2 2 6 H	