



ITEM CODE	CAPACITANCE μF (*)	DIMENSIONS					VOLUME (mm <sup>3</sup> )
		L	T	H	F	d	
ECWFA2J104JC	0.1 (104)	18.2	5.2	10.4	15.0	0.6	835
" 2J124JC	0.12 (124)	"	5.5	10.8	"	"	918
" 2J154JC	0.15 (154)	"	6.0	11.2	"	"	1039
" 2J184JC	0.18 (184)	"	6.5	11.7	"	"	1159
" 2J224JC	0.22 (224)	"	7.1	12.3	"	"	1315
" 2J274JC	0.27 (274)	"	7.8	12.9	"	"	1507
" 2J334JC	0.33 (334)	"	8.5	13.6	"	"	1732
" 2J394JC	0.39 (394)	"	9.2	14.3	"	"	1955
" 2J474JC	0.47 (474)	"	10.0	15.1	"	"	2246
" 2J564JC	0.56 (564)	"	10.9	16.0	"	"	2574
" 2J684JC	0.68 (684)	"	12.0	17.1	"	"	3001
" 2J824JC	0.82 (824)	26.0	10.1	15.3	22.5	0.8	3301
" 2J105JC	1.0 (105)	"	11.1	16.2	"	"	3835
" 2J125JC	1.2 (125)	"	12.1	17.2	"	"	4419
" 2J155JC	1.5 (155)	"	13.5	18.6	"	"	5282
" 2J185JC	1.8 (185)	"	14.8	19.8	"	"	6133
" 2J225JC	2.2 (225)	"	16.3	21.4	"	"	7254

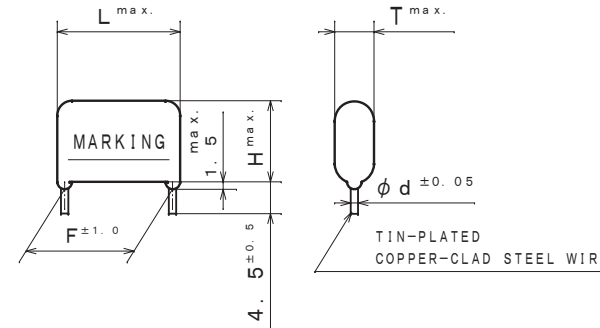


\*F: regulation of the root

ALTERATION		
ISSUE	DESCRIPTION	DATE
△	Company name changed	Apr. 1 2012
△	Company name changed	Apr. 1 2013
△	Company name changed	Apr. 1 2015
△	Company name changed	Apr. 1 2022
SPECIFICATIONS No.		

ITEM CODE NUMBER STRUCTURE

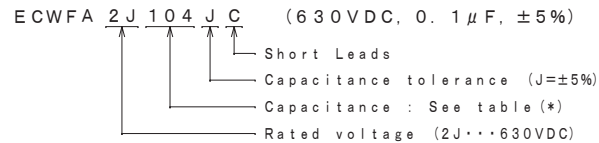

MARKING EXAMPLE



PACKING QUANTITY

Capacitance range (μF)	Quantity (pcs.)
0.1	4000
0.12	3000
0.15~0.18	2400
0.22~0.27	2000
0.33	1800
0.39~0.56	1500
0.68~1.0	1000
1.2~1.5	600
1.8~2.2	500

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.  
The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, type name "WFA" and manufacturer's date code.

PROPERTIES

Capacitance : See table at 1kHz  
 Capacitance tolerance : ±5% (J)  
 Rated voltage : 630VDC (Derating of rated voltage by 1.0%/°C at more than 85°C)  
 Withstand voltage : 630VDC×150% for 60s  
 Insulation resistance : ≥9000MΩ (C≤0.33μF) at 500VDC, 20°C for 60s  
 : ≥3000MΩ·μF (C>0.33μF) at 500VDC, 20°C for 60s  
 Dissipation factor : ≤0.1% at 1kHz, 20°C  
 Category temperature range : From -40°C to +105°C (including temperature rise on unit surface)

QUANTITY of MINIMUM ORDER

Capacitance range (μF)	Quantity (pcs.)
0.1 ~ 1.0	1000
1.2 ~ 1.5	600
1.8 ~ 2.2	500

DESIGN	M. MEKADA
CHECKED	T. KATO
APPROVAL	T. KATO
ESTABLISHMENT	Nov. 15. 2011
TYPE NAME	
ECWFA2J***JC	
NAME Metallized Polypropylene Film Capacitor	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
A008J-J-E (1/1)	

Film Capacitor Business Unit  
 Device Solutions Business Division  
 Panasonic Industry Co., Ltd.