


THIRD ANGLE PROJECTION

ITEM CODE	CAP. μF (*)	DIMENSIONS				
		※ L	※ T	※ H	※ H <sub>1</sub>	※ d
ECWH8103RHA	0.010 (103)	15.4	5.4	9.8	31.8	0.6
" 8123RHA	0.012 (123)	"	5.8	10.2	32.2	"
" 8153RHA	0.015 (153)	"	6.2	10.6	32.6	"
" 8183RHA	0.018 (183)	15.7	6.6	11.0	33.0	0.8
" 8223RHA	0.022 (223)	"	7.1	11.5	33.5	"
" 8273RHA	0.027 (273)	"	7.6	12.0	34.0	"
" 8333RHA	0.033 (333)	"	8.4	12.8	34.8	"
" 8393RHA	0.039 (393)	"	8.9	13.3	35.3	"
" 8473RHA	0.047 (473)	"	9.7	14.1	36.1	"

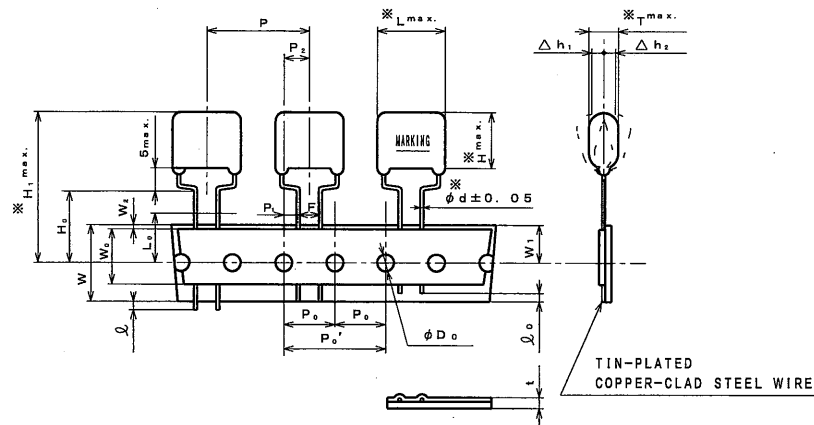


ALTERATION		
ISSUE	DESCRIPTION	DATE
△	Company name changed	Apr. 1 2012
△	Company name changed	Apr. 1 2013
△	Company name changed	Apr. 1 2015

SPECIFICATIONS No.

ITEM CODE NUMBER STRUCTURE

ECWH 8103RHA (800VDC, 0.01μF, ±3%)

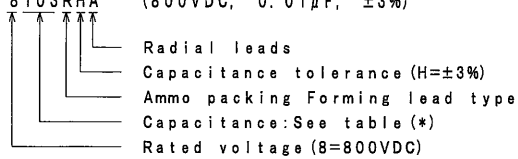

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	30.0	±1.0	Tilt of component and curvature of leads shall be included.
P <sub>0</sub>	Feed hole pitch	30.0	±0.2	
P <sub>1</sub>	Feed hole center to lead	3.75	±0.5	
P <sub>2</sub>	Hole center to comp. center	7.5	±1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	+0.8 -0.2	
Δh <sub>1,2</sub>	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	±0.5	
W <sub>0</sub>	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W <sub>1</sub>	Hole position	9.0	±0.5	
W <sub>2</sub>	Hold-down tape position	0~3.0		
H <sub>0</sub>	Lead-wire clinch height	16.0	+1.0 0	
ℓ	Lead wire protrusion	0	max.	
ℓ <sub>0</sub>	Lead wire depression	7.0	max.	
φD <sub>0</sub>	Feed hole diameter	4.0	±0.2	
t	Total tape thickness	0.7	±0.2	Total thickness including the hold down tape.
L <sub>0</sub>	Length of snapped lead	11.0	max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric. The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING


Marking comprises capacitance, capacitance tolerance, rated voltage, type name "WHA" and manufacturer's date code.

PROPERTIES

- \*Capacitance : See table at 1kHz.
- \*Capacitance tolerance : ±3% (H) at 1kHz.
- \*Rated voltage : 800VDC
- \*Withstand voltage (terminal-terminal) : 800VDC×150% for 60s
- \*Insulation resistance : ≥30000MΩ at 500VDC, 20°C for 60s
- \*Dissipation factor : ≤0.1% at 1kHz, 20°C
- \*Category temperature range : From -40°C to +105°C (including temperature rise on unit surface)

MARKING EXAMPLE

WHA103H  
800V




Reference

DESIGN	<i>M. Mochida</i>
CHECKED	<i>M. Managawa</i>
APPROVAL	<i>T. Taka</i>
ESTABLISHMENT	Feb. 24, 2009
TYPE NAME	ECWH8***RHA
NAME	Metallized Polypropylene Film Capacitor
DRAWING NAME	PRODUCT DRAWING
DRAWING No.	9022J-J-E (1/2)

Toyama-Matsue Plant  
Device Solutions Business Division  
Panasonic Corporation


THIRD ANGLE PROJECTION

- Note 1. No more than 2 consecutive missing is permitted.  
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

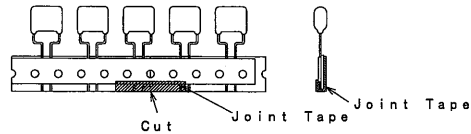


A tape sliding shall not exceed in an allowance of "P<sub>0</sub>" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. Marking on components may not be the same side.  
 Note 4. The tape adhesion is more than 3.92N (400gf)/25mm.  
 Note 5. A tape trailer having at least 3 feed holes is required at the end of the tape.  
 Note 6. The lead clinch at the tape, shows as follows.



Packing specification

1. Case size (Ammo pack)

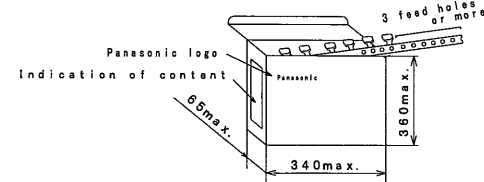

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.01 ~ 0.018	500
0.022, 0.027	400
0.033 ~ 0.047	300

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.  
(Surface printed placing upward)  
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.

Reference

TYPE NAME	ECWH 8***RHA
DRAWING No.	9022J-J-E (2/2)

Toyama-Matsue Plant  
 Device Solutions Business Division  
 Panasonic Corporation