

MN101C145 , MN101C147

Type		MN101C145 , MN101C147	
ROM (×8-Bit)		8 K / 16 K (External memory can be expanded)	
RAM (×8-Bit)		256 / 512 (External memory can be expanded)	
Minimum Instruction Execution Time		0.10 μs (at 4.5 V to 5.5 V, 20 MHz) 0.25 μs (at 2.7 V to 5.5 V, 8 MHz) 1.00 μs (at 2.0 V to 5.5 V, 2 MHz)* 125 μs (at 2.0 V to 5.5 V, 32 kHz)*	
* The lower limit for operation guarantee for EPROM built-in version is 2.7 V.			
Interrupts		• RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • Timer 2 • Timer 3 • Timer 4 • Timer 5 • Time Base • Serial 0 • Automatic Transfer finish • A/D Conversion finish	
Timer Counter		Timer Counter 2 : 8-Bit × 1 (Square-Wave/8-Bit PWM Output, Event Count, Generation of Remote Control Carrier) Clock Source 1/1, 1/4 of System Clock, 1/1 of XI Oscillation Clock, External Clock Input Interrupt Source Coincidence with Compare Register 2 Timer Counter 3 : 8-Bit × 1 (Square-Wave Output, Event Count, Generation of Remote Control Carrier, Serial 0 Baud Rate Timer) Clock Source 1/4, 1/16 of System Clock, 1/1 of OSC Oscillation Clock, External Clock Input Interrupt Source Coincidence with Compare Register 3 Timer Counter 2, 3 can be cascade-connected. Timer Counter 4 : 16-Bit × 1 (Square-Wave/16-Bit PWM Output, Event Count, Synchronous Output Event, Input Capture) Clock Source 1/4, 1/16 of System Clock, 1/1 of OSC Oscillation Clock, External Clock Input Interrupt Source Coincidence with Compare Register 4 Time Base Timer (One-Minute Count Setting, Independently operable 8-Bit Timer Counter 5) Clock Source 1/4 of System Clock, 1/1, 1/8192 of OSC Oscillation Clock, 1/1, 1/8192 of XI Oscillation Clock Interrupt Source Coincidence with Compare Register 5, 1/8192 Prescaler Overflow Watchdog Timer Interrupt Source 1/65536, 1/262144, 1/1048576 of System Clock (ROM Option)	
Serial Interface		Serial 0 : 8-Bit × 1 (Synchronous Type/Simple UART[Half-Duplex]) Clock Source 1/2, 1/4, 1/16 of System Clock 1/2 of Timer Counter 3	
I/O Pins	I/O	41	• Common use 37 • Specified pull-up Resistor available • Input/Output selectable (bit unit)
	Input	13	• Common use • Specified pull-up Resistor available

A/D Inputs 10-Bit × 8ch (with S/H)

Special Ports Buzzer Output, Remote Control Carrier Signal Output, High-Current Drive Port

Package LQFP064-P-1414

Electrical Characteristics

Supply Current


Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating Supply Current	IDD1	fosc = 20 MHz, VDD = 5 V			60	mA
	IDD2	fx = 32 kHz, VDD = 3 V			100	μA
Supply Current at HALT	IDD3	fx = 32 kHz, VDD = 3 V			8	μA
Supply Current at STOP	IDD4	VDD = 5 V, Ta = 25 °C			1	μA
		VDD = 5 V, Ta = -40 °C to +85 °C			30	μA

Support Tool

In-Circuit Emulator PX-ICE101C / D + PX-PRB101C14-C / D

EPROM built-in Type	Type	MN101CP147BL
	ROM (× 8-Bit)	16 K
	RAM (× 8-Bit)	512
	Minimum Instruction Execution Time	0.10 μs (at 4.5 V to 5.5 V, 20 MHz)
	Execution Time	0.25 μs (at 2.7 V to 5.5 V, 8 MHz)
	Package	LQFP064-P-1414

Pin Assignment

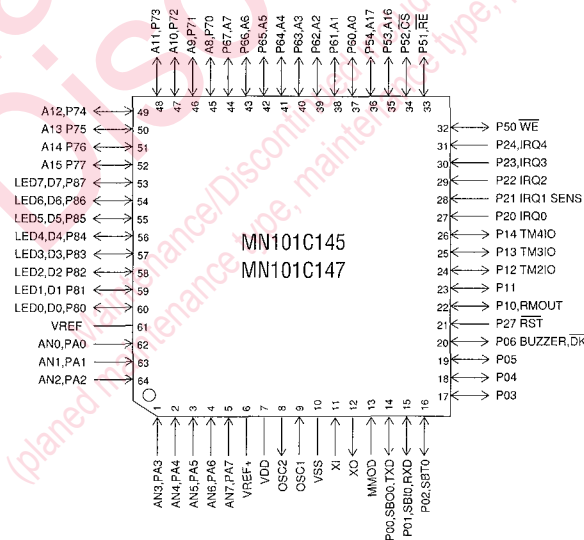

LQFP064-P-1414

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.